


Technical Datasheet

tasker® C192 TS – 2x1,50 mm²

Extra Flex Transparent Flat Speaker Cable

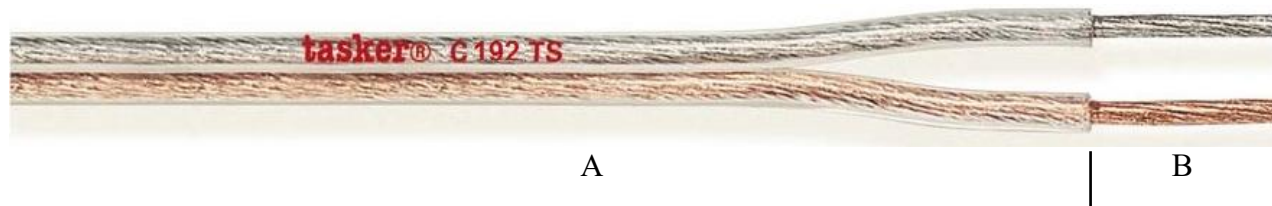

CATEGORY Flexible Audio Cable (See Audio Catalogue)
APPLICATIONS Speaker and Home Theatre installation

- A:** Transparent **PVC** sheath.
Outer cable dimension 3,00x6,10 (±0,20) mm.
- B:** One conductor made of O.F.C. tinned copper and one of O.F.C. Red Copper, both realized with elementary wires stranded in beams and stranded again to create cores.
Nominal cross section 2x1,50 mm², formation 7x27x0,10 mm.

MARKING **tasker® C192TS - 2x1,50 mm² – O.F.C. - SPEAKER CABLE - MADE IN ITALY**
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE** or **PUR**.
PRODUCTION

Conductors Properties

Conductor Resistance	12,50 Ω/Km
Operating Voltage (Not for Power)	300V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. B / 18.05.26