


Technical Datasheet

tasker® C238 TN – 2x2,00 mm²

Transparent Divisible Flat Cable

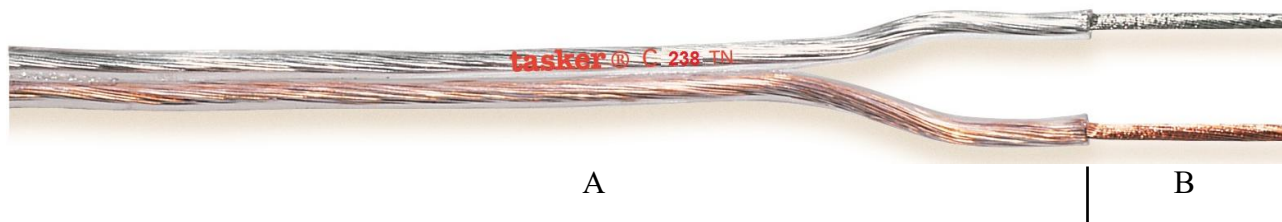

CATEGORY Flexible Audio Cable (See Audio Catalogue)
APPLICATIONS Speaker and Home Theatre installation

A: Transparent PVC Sheath.
Outer Diam. Ø 3,20x6,50 (±0,20) mm.

B: One conductor of O.F.C. tinned copper and one of O.F.C. Red Copper.
Stranded Formation 40x0,25 mm.
Nominal cross section 2x2,00 mm².

MARKING tasker® C238 TN - 2x2.00 mm² – O.F.C. SPEAKER CABLE MADE IN ITALY
CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PUR.

Conductors Properties

Conductor Resistance	8,00 Ω/Km
Operative Voltage (Not for Power)	300 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. C / 15.05.26
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			