


Technical Datasheet

tasker® TSK808 – 8x2x0,14 mm² ✓RoHS₃

Digital Audio Multipair Cable 110 Ohm AES/EBU

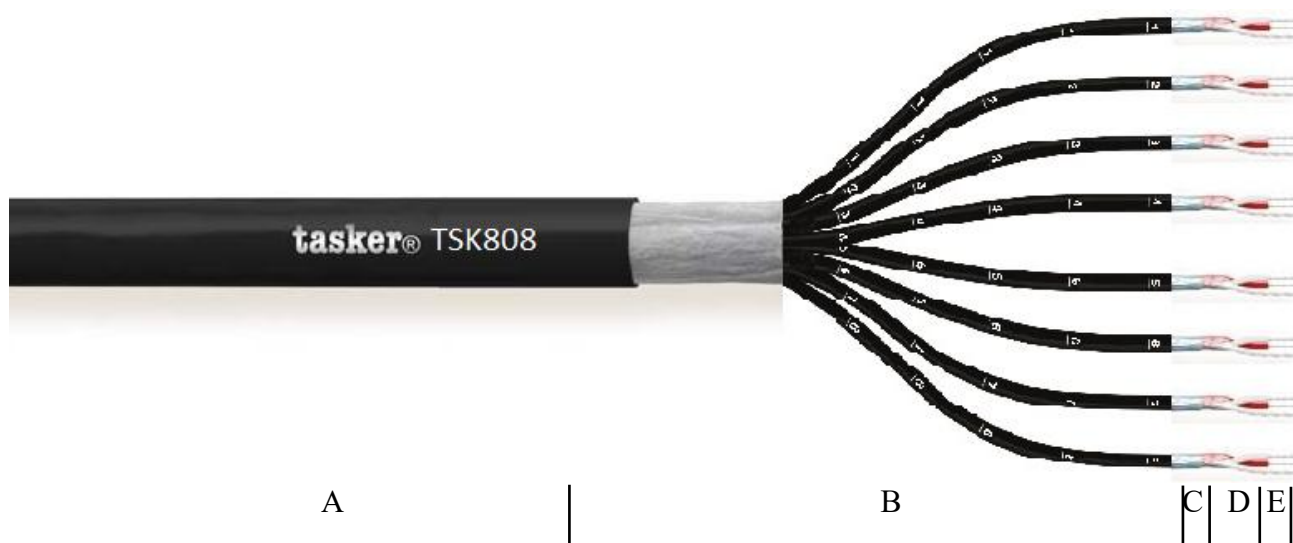

CATEGORY

Digital Multipair Audio Cable (See Audio Catalogue)

APPLICATIONS

Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black **PVC** Sheath.
Outer cable Ø: 12,90 (±0,20) mm.
- B:** The single pairs are isolated with black **PVC**, numbered from one to the number of elements and wrapped together with polyester base tape.
Diam. Ø 3,20 (±0,20) mm.
- C:** The single pair are shielded with aluminum tape covering 100% + tinned copper Drain Wire.
- D:** The single cores are insulated with **foam PE**, colored one white and one red, and wrapped with not weaved polyester base tape.
Diam. Ø 1,20 (±0,20) mm.
- E:** O.F.C. tinned copper formation 18x0,10 mm.
Nom. Cross section 8x2x0,14 mm².

MARKING

tasker® TSK 808 8x2x0,14 mm² - EXTRA FLEX DIGITAL AUDIO MULTIPAIR CABLE - MADE IN ITALY

MILAN S.r.l. a socio Unico

Head Office - Export Department

Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione

Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.

Cod. Fisc. e RIVA/VAT Nr. IT 03835660154

RE.A. MI 975732 Reg. Imprese MI 178864-5179-14

PEC: taskerpec@legalmail.it

**CUSTOM
PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	138,00 Ω /Km
Capacity Core/Core	50 pF/m
Capacity Core/Shield	100 pF/m
Impedance	110 Ω
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 16.05.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			