


Technical Datasheet

tasker® C324 – 24x2x0,22 mm²

Individually Shielded Multi Pair Cable

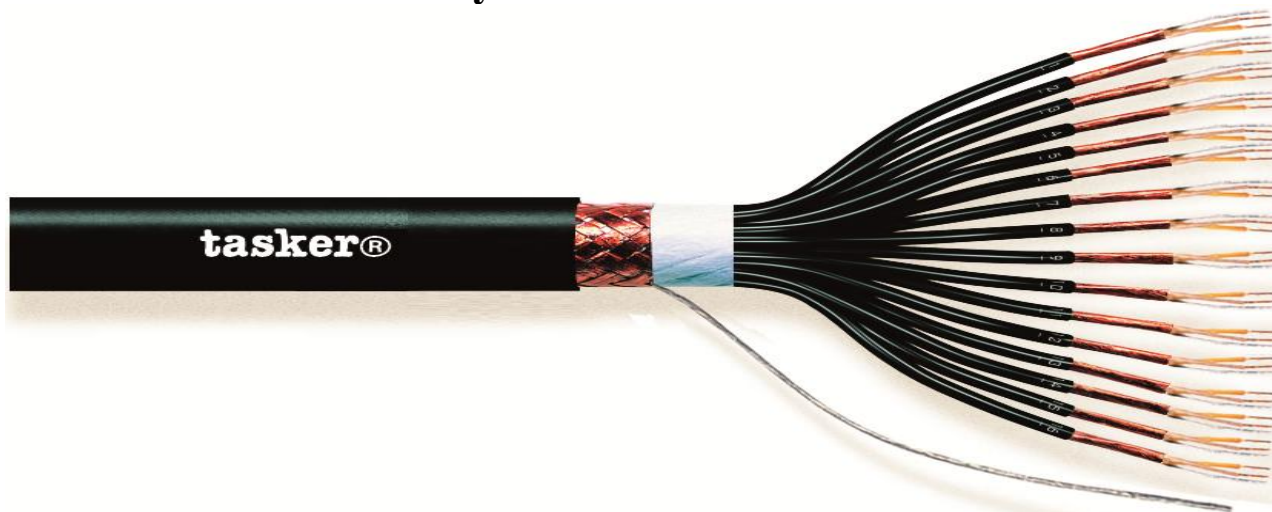

A	B	C	D	E	F	G
---	---	---	---	---	---	---

NOTE

CATEGORY

APPLICATIONS

The picture don't represent the real number of conductors
Multipair Audio Cable (See Audio Catalogue)
Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Black PVC sheath.
Outer cable dimension Ø 20,00 (±0,20) mm.
- B:** Total Shielding in O.F.C. red copper Braid covering 85%.
+ Tinned Copper Drain Wire.
- C:** Total taping in not woven polyester tape.
- D:** Inner sheaths in PVC, Black and numbered. Diam. Ø 3,00 (±0,20) mm.
- E:** Shielding on each single pair in O.F.C. red copper Spiral covering 100%.
- F:** Core Insulation with solid PE, colored one Transparent and one Yellow.
Diam. Ø 1,00 (±0,20) mm.
- G:** O.F.C. red copper formation 28x0,10 mm.
Nom. Cross section 24x2x0,22 mm².

MILAN S.r.l. a socio Unico
Head Office - Export Department
 Viale Europa, 74
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.4556 - 4158
 www.taskercables.com

Ufficio Commerciale e Distribuzione
 Viale Europa, 72 Strada F12
 20047 Cusago (MI) Italy
 Tel. +39 02 9039.0037 - 0059
 www.tasker.it

Capitale Sociale € 100.000,00 i.v.
 Cod. Fisc. e RIVA/VAT Nr. IT 03835660154
 R.E.A. MI 975732 Reg. Imprese MI 178864-5179-14
 PEC: taskerpec@legalmail.it

MARKING

tasker® C324 24x2x0,22mm² PROFESSIONAL SHIELDED MULTIPAIR CABLE FOR
 AUDIO MIXER MADE IN ITALY

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PUR**,
 with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/m
Capacity Core/Shield	160 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			