


Technical Datasheet

tasker® C100 TS – 2x3,00 mm²

Special Extra Flex Speaker Cable

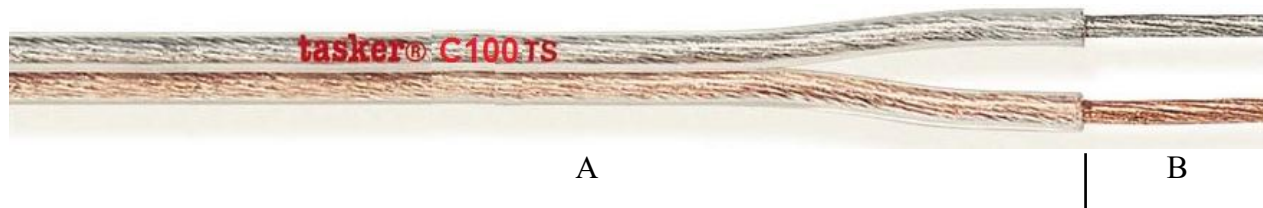

CATEGORY Flexible Audio Cable (See Audio Catalogue)
APPLICATIONS Speaker and Home Theatre installation

- A:** Transparent **PVC** sheath.
Outer cable dimension 5,80x11,20 (±0,20) mm.
- B:** One conductor made of O.F.C. tinned copper and one of O.F.C. Red Copper, both realized with elementary wires stranded in beams and stranded again to create cores.
Nominal cross section 2x3,00 mm², formation 7x25x0,15 mm.

MARKING **tasker® C100TS - 2x3,00 mm² – O.F.C. SPEAKER CABLE MADE IN ITALY**
CUSTOM This product may be custom produced also in **L.S.Z.H.** polymer, **PE** or **PUR**.
PRODUCTION

Conductors Properties

Conductor Resistance	5,70 Ω/Km
Operating Voltage (Not for Power)	300V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 18.05.26
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			